

Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 1 087 541 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:

28.03.2001 Bulletin 2001/13

(51) Int. Cl.⁷: H04B 7/005

(21) Application number: 00307609.8

(22) Date of filing: 04.09.2000

(84) Designated Contracting States:

AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE

Designated Extension States:

AL LT LV MK RO SI

(30) Priority: 14.09.1999 US 395494

(71) Applicant:

LUCENT TECHNOLOGIES INC.

Murray Hill, New Jersey 07974-0636 (US)

(72) Inventors:

• Eibling, Edward Ellis

Convent Station, New Jersey 07961 (US)

• Kamel, Raafat Edward

Westfield, New Jersey 07090 (US)

• Kuo, Wen-Yi

Morganville, New Jersey 07751 (US)

• Thomas, Mathew

Scotch Plains, New Jersey 07076 (US)

• Weaver, Carl Francis

Morris Plains, New Jersey 07950 (US)

(74) Representative:

Watts, Christopher Malcolm Kelway, Dr. et al


Lucent Technologies (UK) Ltd,

5 Mornington Road

Woodford Green Essex, IG8 0TU (GB)

(54) **Apparatus and method for controlling the transmission power of the forward link of a wireless communication system**

(57) A method that adjusts the power level of a set of forward-link signals of a base station responsive to the loading of the forward link as determined by a power level measurement of the signal set. One power level measurement is a pilot fraction of the forward link. Other power level measurements, such as the signal set's power level, can be used, alone or in combination, instead of or in addition to the pilot fraction of the forward link to adjust the power level of the signal set. The power level of the signal set can be changed in any manner, including by scaling it by a scaling factor, or by increasing the power level by a fixed or a variable amount. The power level measurement of the signal set is obtained during a current time period. The scaling factor that will be used in the subsequent time period is determined using the power level measurement. In one embodiment of the invention, the scaling factor can be obtained from a look-up table that is based on the power level measurement. If the cell containing the base station includes several sectors, the power level of the signal set in a sector is adjusted when the power level measurement in that sector indicates that the power level should be adjusted.

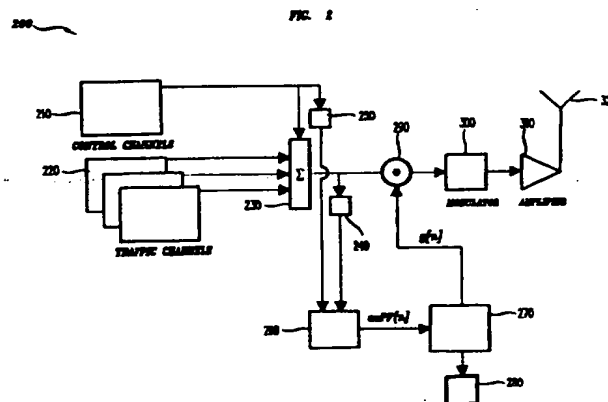

D scription

Background of the Invention

Field of the Invention

[0001] The present invention relates generally to wireless communication systems and, in particular, to power of the forward link in wireless communication systems.

Description of the Related Art

[0002] Wireless communication systems employ Cod Division Multiple Access ("CDMA") modulation techniques to permit a large number of system users to communicate with one another. The ability of such a system to work is based on the fact that each signal is coded with spreading sequences, such as pseudo-random noise ("PN") sequences, and orthogonal spreading sequences such as Walsh codes. This coding permits signal separation and signal reconstruction at the receiver. In typical CDMA systems, communication is achieved by using a different spreading sequence for each channel. This results in a plurality of transmitted signals sharing the same bandwidth. Particular transmitted signals are retrieved from the communication channel by despread a signal from all of the signals by using a known user despread sequence related to the spreading sequence implemented at the transmitter.

[0003] Figure 1 illustrates CDMA system 10. The geographic area serviced by CDMA system 10 is divided into a plurality of spatially distinct areas called "cells." Although cells 2, 4, 6 are illustrated as a hexagon in a honeycomb pattern, each cell is actually of an irregular shape that depends on the topography of the terrain surrounding the cell. Each cell 2, 4, 6 contains one base station 12, 14, and 16, respectively. Each base station 12, 14, and 16 includes equipment to communicate with Mobile Switching Center ("MSC") 18, which is connected to local and/or long-distance transmission network 20, such as a public switch telephone network (PSTN). Each base station 12, 14, and 16 also includes radios and antennas that the base station uses to communicate with mobile terminals 22, 24.

[0004] When a call is set up in a CDMA system, a base station and mobile terminal communicate over a forward link and a reverse link. The forward link includes communication channels for transmitting signals from the base station to the mobile terminal, and the reverse link includes communication channels for transmitting signals from the mobile terminal to the base station. The base station transmits certain types of control information to the mobile terminal over a communication channel, referred to herein as a forward control channel, also known in the art as a forward overhead channel. Forward control channels include the pilot, paging, and synchronization channels, as well as other control chan-

nels. The base station transmits voice or data, and certain types of control information over a communication channel, referred to herein as a forward traffic channel. The signals on the communication channels are organized in time periods, referred to herein as frames. Frames are typically 20-millisecond (ms) in length. The signals transmitted over the control channels are referred to herein as control signals, and the signals transmitted over the traffic channels are referred to herein as traffic signals.

[0005] When a call is added to a cell, the noise level in the cell and in the surrounding cells is increased. If there is a large number of calls in a particular cell 4, it becomes difficult for mobile terminal 24 to clearly obtain the pilot and/or the forward-link traffic signal, particularly if mobile terminal 24 is at the edge of a cell. When mobile terminal 24 cannot obtain a clear and continuous pilot and/or the forward-link traffic signal, problems can result on the call between mobile terminal 24 and base station 14. These problems can range from not being able to despread a frame, which results in an erred frame, to the mobile terminal 24's user hearing noise or silence instead of the voice or data that was transmitted, which results in an inconvenience to the user. If mobile terminal 24 cannot obtain a clear and continuous pilot and/or the forward-link traffic signal for a prolonged period or time, such as several seconds, the call may be dropped, which results in an inconvenience to the user and a loss of revenue.

[0006] When cell 4 is heavily loaded with calls, base station 14's equipment may not be able to handle all of the calls in cell. This can occur when the power transmitted by the base station exceeds the power level at which the base station's equipment is designed to operate over an extended time period. In some wireless communication systems 10, when there are many calls base station 14 initiates overload control. Base station 14 implements overload control by using one of several remedies. These remedies typically include: a) denying access to any new call requests, referred to herein as call blocking; b) restricting transmitted signals to their current levels; or c) even clipping transmitted signals. The inventors have discovered that this could occur even when other cells 2 and 6, may be able to accept new calls. This situation results in a loss of capacity of the overall wireless communication system 10.

Summary of the Invention

[0007] The invention solves the above problems by adjusting the power level of a set of forward-link signals of a base station responsive to the loading of the forward link as determined by a power level measurement of the signal set. The power level of the signal set is adjusted independent of the individual power control of each of the forward-link signals in the set. Adjusting the power level of the signal set allows a cell that contains the base station to grow, i.e. cover a larger area, when

the loading of the forward link is low. This allows a lightly loaded cell to accept calls from mobile terminals that may otherwise have been geographically constrained to a heavier loaded cell, thereby lightening the load in the heavier loaded cell. This also allows mobile terminals at the edge of cells to receive signals more clearly.

[0008] One power level measurement is a pilot fraction of the forward link, which is a ratio of the pilot's power level to the power level of the forward-link signals. Other power level measurements, such as the signal set's power level, can be used, alone or in combination, instead of or in addition to the pilot fraction of the forward link to adjust the power level of the signal set. Adjusting the power level of the signal set using several measurements involves determining how the power level of the signals set should be adjusted based on any of the power level measurements and adjusting the power level of the signal set when any one of the measurements indicates that the power level should be adjusted. Alternatively, the power level can be adjusted when several of the measurements indicate that the power level should be adjusted.

[0009] The power level of the set can be changed in any manner, including by scaling it by a scaling factor, or by increasing the power level by a fixed or a variable amount. The power level measurement of the signal set is obtained during a current time period. The scaling factor that will be used in the subsequent time period is determined using the power level measurement. In one embodiment of the invention, the scaling factor can be obtained from a look-up table that is based on the power level measurement.

[0010] If the cell containing the base station includes several sectors, the power level of the signal set in a sector is adjusted when the power level measurement in that sector indicates that the power level should be adjusted.

Brief Description of the Drawings

[0011]

Figure 1 is a block diagram of a portion of a conventional base station; and

Figure 2 is a block diagram of a portion of a base station where the power level of a set of forward-link signals is adjusted responsive to the loading of the forward link as determined by a pilot fraction.

Detailed Description

[0012] Figure 2 shows a portion of base station 200 that adjusts the power level of a set of forward-link signals of a base station responsive to the loading of the forward link as determined by a power level measurement of the forward link. The power level measurement used in base station 200 is a pilot fraction of the forward link, which is a ratio of the pilot's power level to the

power level of the set of forward-link signals of base station 200.

[0013] Although, in the illustrative embodiment base station 200 uses the pilot fraction to adjust the power level of the signal set, other power level measurements can be used, alone or in combination, instead of or in addition to the pilot fraction of the forward link to adjust the power level of the signal set. For example, the power level measurement can be the power level of the signal set.

[0014] Each of the base station's signals is the output of one of channel elements 210, 220. The channel elements encode the data with the spreading codes. The control signals are the outputs of control-channel elements 210, and the traffic signals are the output of traffic-channel elements 220. The output of all of the channel elements 210 and 220 is coupled to combiner 230 where all of the signals are combined together to form a combined-baseband signal. The signals are organized in frames, which, as described above, are typically 20-millisecond (ms) time periods. The instantaneous signal levels of the combined-baseband signal are measured throughout the current frame, and are then averaged in sample-square-integrate circuit 240. This averaged power level is referred to herein as the combined-baseband signal's power level for the current frame. The pilot's instantaneous signal levels are also measured throughout the current frame, and are then averaged in sample-square-integrate circuit 250. This averaged power level is referred to herein as the pilot's power level for the current frame. The combined-baseband signal's power level and the pilot's power level for the current frame are the input of first averaging element 260.

[0015] First averaging element 260 determines the current frame's ratio of the pilot's power level to the combined-baseband signal's power level, referred to herein as the current frame's pilot fraction $PF[n]$. First averaging element 260 determines the average pilot fraction $avPF[n]$ using a single pole infinite impulse response (IIR) filter. The functionality of the IIR filter is described in equation 1. As shown in equation 1, the value of the average pilot fraction $avPF[n]$ is based on the current frame's pilot fraction $PF[n]$ scaled by λ , and the previous frame's average pilot fraction $avPF[n]$ scaled by an adjustment factor based on λ . λ controls how rapidly the average pilot fraction $avPF[n]$ changes in response to variations in the pilot fraction of the current frame $PF[n]$. λ is selected to balance a desire to obtain a pilot fraction that is as reflective as possible of the current frame's pilot fraction and a desire to have a smoothly varying power level. A typical value for λ can be between about 2 and 200.

$$avPF[n] = \frac{1}{\lambda} \cdot PF[n] + \left(1 - \frac{1}{\lambda}\right) \cdot avPF[n-1] \quad (1)$$

[0016] First averaging element 260 provides the current average pilot fraction $avPF[n]$ to controller 270. Controller 270 obtains a look-up table from memory 280. The look-up table relates the average pilot fraction $avPF[n]$ to scaling factor $g[n+1]$. Table 1 is an example of a look-up table that can be used. Controller 270 obtains scaling factor $g[n+1]$ from the look-up table by determining the value in the look-up table to which the average pilot fraction $avPF[n]$ is closest. When the pilot fraction is directly between two values listed in the table scaling factor $g[n+1]$ can be chosen to be either the one associated with the greater or smaller value, although it is preferable to choose the smaller value to ensure that base station 200 can produce the required power level without straining its amplifier.

Table 1

| Average Pilot Fraction | Scaling Factor |
|------------------------|----------------|
| .78 | 1.5 |
| .6 | 1.4 |
| .5 | 1.3 |
| .4 | 1.2 |
| .3 | 1.1 |
| .2 | 1 |
| .1 | .9 |

[0017] The scaling factors in the look-up table are chosen to adjust the power level of the signal set to maximize the capacity of the system without overloading base station 200's equipment. Preferably, a scaling factor of one is associated with the full load pilot fraction, which is the pilot fraction when the base station is at full load. Typically, the full load pilot fraction is between .1 and .25. Also preferably, the largest scaling factor is associated with pilot-fraction at no load. At no load the base station is typically transmitting the pilot, page, and synch channels. The pilot fraction at no load is the ratio of the pilot's power level to the sum of power levels of the pilot, the paging channel, and the synch channel. The pilot fraction at no load is typically about .78.

[0018] When the signal set's power level is scaled by the scaling factor that increases the signal set's power level, then, typically, the forward-link coverage area of base station 200 also increases. This means after the power level of the signal set is scaled, the signals may be able to reach mobile terminals that the signal may not have been able to reach before. However, the forward-link traffic signals do not need to reach mobile terminals that the pilot does not reach. This is due to the fact that if a mobile terminal is not receiving the pilot it is not able to communicate with base station 200, and therefore there is no benefit in the mobile terminal

receiving the signal. Therefore, the forward-link coverage area preferably does not exceed an area in which a mobile terminal at the edge of the area is able to receive the pilot.

[0019] After, controller 270 obtains scaling factor $g[n+1]$, controller 270 provides the scaling factor as an input of multiplier 290. The other input of multiplier 290 is the combined-baseband signal, which is the output of combiner 230. Multiplier 290 multiplies the combined-baseband signal and scaling factor $g[n+1]$ to scale the power level $P[n+1]$ of the signal set during the subsequent frame. The power level of the signal set is scaled by scaling factor $g[n+1]$, which is obtained using the average pilot fraction $avPF[n]$ of the last frame. However, the delay between the frame whose pilot fraction is used to obtain the scaling factor, and the frame whose power level is scaled by the scaling factor can be made larger or smaller based on the speed of first averaging element 260 and controller 270. For example, if the circuitry of the first averaging element 260 and controller 270 is fast enough, or if the signals can be delayed until the scaling factor is obtained, the power level $P[n]$ can be scaled by scaling factor $g[n]$ obtained using the average pilot fraction $avPF[n]$ of the current frame. The signal can be delayed by adding a pipeline delay between combiner 230 and multiplier 290.

[0020] Multiplier 290 multiplies the scaling factor and the combined-baseband signal that forms the subsequent frame, thereby scaling the power level $P[n+1]$ of all of the signals by the same amount. The result is then input into modulator 300 where the signal is slightly amplified and is modulated onto a carrier signal. The modulated signal is amplified in amplifier 310 and then transmitted via the antenna 320 to the mobile terminals.

[0021] Although, in this embodiment the pilot fraction is the power level measurement used to obtain the scaling factor, in alternative embodiments other power level measurements, such as the power level of the signal set can be used, alone or in combination, instead of or in addition to the pilot fraction of the forward link to obtain the scaling factor. Therefore, similar look-up tables as the one described above can be obtained for other power level measurements. Determining the scaling factor using one of the other power level measurements is performed in a similar manner as for the pilot fraction.

[0022] Additionally, although, in this embodiment a look-up table is used to obtain the scaling factor, in alternative embodiments the scaling factor can be obtained in other ways.

[0023] The adjustments of the power level of the signal set described above are performed independent of the conventional individual power control of each of the traffic signals. Therefore, when the mobile terminal receives a traffic signal, in IS-95 compliant CDMA systems the mobile terminal checks to determine whether the received forward-link traffic frame is in error. In a subsequent reverse-link traffic frame that the mobile ter-

minal transmits, the mobile terminal indicates to base station 200 whether there was an error. When the mobile terminal receives a traffic signal, in CDMA 2000 systems the mobile terminal checks to determine whether the received forward-link traffic signal has sufficient signal strength to overcome the noise in the system, typically by checking the forward-link traffic signal's signal-to-noise ratio. The mobile terminal then indicates to base station 200 whether the forward-link traffic signal strength is sufficient. Upon receiving from the mobile terminal the information of whether there was an error (in IS-95 compliant CDMA systems) or whether the forward-link traffic signal strength is sufficient (in CDMA 2000 systems) base station 200 determines whether its forward link to this mobile terminal is in fading. Base station 200 then adjusts the power level of the signal to the mobile terminal accordingly, prior to the signal being summed in combiner 230. Preferably, the individual power control of each of the signals includes a maximum power level above which the signal's power level is not allowed to go. If a signal's power level is at this maximum power level, and the mobile terminal receiving this traffic signal indicates to the base station to increase the power level of this signal the base station will not further increase the power level of this traffic signal. The maximum power level ensures that no signal is using a significantly disproportionate amount of power.

[0024] After base station 200 adjusts the power level of the signal to the mobile terminal, the signal is then combined with the signals from other traffic channels, and then, if necessary, scaled.

[0025] The method for adjusting the power level of the signal set based on the power level measurement of the signal set can be used with methods of overload control. For example, the method for adjusting the power level of the signal set can be used with the overload power control method disclosed in EP application no. 00305859.1.

[0026] This overload power control method changes the power level of a set of forward-link signals responsive to a overload control threshold power level that is based on the amplifier's maximum continuous power level, independent of the individual power control of each of the forward-link signals in the signal set. The power level of the signal set is changed by scaling it by a scaling factor. The total power level of the signal set is obtained during a current time period, and then the scaling factor that will be used in the subsequent time period is determined. The scaling factor is preferably based on the total power level of the signal set for the current time period, a scaling factor used during the current time period, and the overload control threshold power level. The amount by which the total power level exceeds the amplifier's maximum continuous power level is the overload amount. The scaling factor is selected so that for each time period the overload amount is reduced by a percentage or a fixed factor. For example, the overload amount can be reduced by 3% for the current time

period, then the percentage may be changed for a subsequent time period based on the scaling factor of the current time period and the overload amount of the subsequent interval.

[0027] Additionally, the method for adjusting the power level of the signal set can be used with the method for initiating call blocking disclosed in EP application no. 00305850.0.

[0028] This method initiates call blocking responsive to a call-quality measurement of the forward link. The call-quality measurement is a measurement of how well a mobile terminal is able to receive the forward link. One call-quality measurement is the pilot fraction of the forward link. Call blocking can be initiated when the average pilot fraction is below a pilot-fraction blocking threshold. The pilot fraction is determined for the time period, and then used to determine an average pilot fraction for the time period. The average pilot fraction for the current time period is based on a pilot fraction for the current time period, and an average pilot fraction for a previous time period. When the average pilot fraction is below the pilot-fraction blocking threshold, call blocking is initiated. The pilot-fraction blocking threshold is preferably based on: 1) the pilot fraction when the base station is at full load; 2) the size, shape, and terrain of the cell; and 3) the aggressiveness of the overload control. In the preferred embodiment, the set includes all of the signals generated by the base station, alternatively, the set can include fewer than all the signals generated by the base station. For example, the set can include a plurality of traffic signals, or a plurality of traffic signals and one or more of the control signal. If the cell includes several sectors, the call blocking is initiated on a sector basis when the average pilot fraction of the sector is below the pilot-fraction blocking threshold.

[0029] The foregoing is merely illustrative. Thus, for example although in the illustrative embodiment the time period is one frame, any time period can be used during which a power level measurement of the forward link can be taken. For example, the time period can be several frames, or one or several power control groups, which are time periods having a length of 1/16 of a frame.

[0030] Furthermore, although in the illustrative embodiment all the signals in a sector of a cell containing the base station are scaled by the scaling factor, in an alternative embodiment fewer than all the signals in a sector can be scaled by the scaling factor. For example, the signal set can include a plurality of the traffic signals, or a plurality of the traffic signals and one or more control signals.

[0031] Still further, although in the illustrative embodiment the method is implemented in hardware, it can be implemented in software.

[0032] Additionally, although in the illustrative embodiment each cell is an omni sector cell, the cell can be divided into a plurality of sectors, with each sector having its own channel elements, radios, which include

a modulator and an amplifier, and antennas. In this case, the power level measurement is taken on a per-sector basis and used to obtain a scaling factor. The power level of the signal set in a sector is adjusted when the power level measurement in that sector of the cell indicates that the power level should be adjusted.

[0033] Moreover, in one of the illustrative embodiments the average pilot fraction for the current time period is determined using an IIR filter. In an alternative embodiment a finite impulse response (FIR) filter can be used to determine the average pilot fraction. The FIR filter would use the pilot fraction for the current time period, and the pilot fractions of a plurality of frames, averaged over a plurality of frames.

[0034] Additionally, although in the illustrative embodiment the channel elements are shown in parallel, with the resulting signals combined in one combiner, the channel elements can be set up in series. In this case, the signal from each channel element is combined with signals from the previous channel elements in the series.

[0035] Furthermore, although in the illustrative embodiment the combined-baseband signal is scaled, in alternative embodiments the individual signals can be scaled. For example, the scaling factor is still obtained using the combined-baseband signal. However, instead of multiplying the combined-baseband signal by the scaling factor in multiplier 290 and 350, the scaling factor can be provided to control elements 210 and 220 where the individual signals can be scaled by the scaling factor.

[0036] Additionally, although in the illustrative embodiment the wireless communication system is a CDMA system, this should not be construed to limit the present invention to base stations and mobile stations employing CDMA techniques. The present invention may equally be applicable to base stations and mobile stations employing other multiple access techniques, such as Time Division Multiple Access ("TDMA"), and Global System for Mobile (GSM).

[0037] While the invention has been described with reference to a preferred embodiment, it will be understood by those skilled in the art having reference to the specification and drawings that various modifications and alternatives are possible therein without departing from the scope of the invention.

Claims

1. A method for controlling a power level of signals transmitted by a base station (200) in a wireless system, the base station (200) having a signal set of forward link signals, the method CHARACTERIZED BY the steps of:

obtaining a power level measurement of the forward link signal set; and
adjusting the power level of the signal set

responsive to the power level measurement.

2. The method of claim 1, CHARACTERIZED IN THAT the power level measurement is a pilot fraction.
3. The method of claim 1, CHARACTERIZED IN THAT the power level measurement is the signal set's power level.
4. The method of claim 1, CHARACTERIZED IN THAT the signal set comprises all signals in a sector of a cell containing the base station.
5. The method of claim 1, CHARACTERIZED IN THAT:

the obtaining step comprises:

obtaining a power level ($P[n]$) of the signal set for a time period;
obtaining a power level of the pilot for the time period; and
determining a pilot fraction ($PF[n]$) for the time period; the adjusting step comprises:
determining a scaling factor based on a the pilot fraction ($PF[n]$); and
scaling the power level of the signal set using the scaling factor.

6. The method of claim 5, CHARACTERIZED IN THAT a cell containing the base station (200) comprises a plurality of sectors, each corresponding to at least one signal set and wherein:

the step of obtaining the power level of the signal set comprises obtaining a power level for each signal set for the time period;
the step of determining the pilot fraction comprises determining a pilot fraction for each signal set for the time period;
the step of determining the scaling factor comprises determining a scaling factor for each signal set; and
the scaling step comprises scaling the power level of each signal set using the scaling factor determined for that set.

7. The method of claim 1, CHARACTERIZED IN THAT:

the obtaining step comprises:

obtaining a power level ($P[n]$) of the signal set for a time period;
obtaining a power level of the pilot for the time period; and
determining an average pilot fraction

(avPF[n]) for the time period;

the adjusting step comprises:

determining a scaling factor based on a the 5
average pilot fraction (avPF[n]); and
scaling the power level of the signal set
using the scaling factor.

8. The method of claim 7, CHARACTERIZED IN 10
THAT the average pilot fraction (avPF[n]) for the
time period is based on a ratio of the pilot's power
level to the signal set's power level for the time
period, and an average pilot fraction (avPF[n-1]) for
a previous time period. 15
9. The method of claims 5 and 7, CHARACTERIZED
IN THAT determining the scaling factor comprises
looking up the scaling factor in a look-up table that
relates the pilot fraction to the scaling factor. 20
10. The method of claims 5 and 7, CHARACTERIZED
IN THAT the time period comprises a frame.
11. The method of claims 5 and 7, CHARACTERIZED 25
IN THAT the time period comprises a plurality of
frames.
12. The method of claims 5 and 7, CHARACTERIZED
IN THAT the scaling step comprises scaling the 30
power level of the signal set during a subsequent
time period using the scaling factor.
13. The method of claims 5 and 7, CHARACTERIZED
IN THAT the scaling step comprises scaling the 35
power level of the signal set during the time period
using the scaling factor.
14. The method of claim 7, CHARACTERIZED IN 40
THAT a cell containing the base station (200) com-
prises a plurality of sectors, each corresponding to
at least one signal set and wherein:

the step of obtaining the power level of the sig-
nal set comprises obtaining a power level for 45
each signal set for the time period;
the step of determining the average pilot frac-
tion comprises determining an average pilot
fraction for each signal set for the time period;
the step of determining the scaling factor com- 50
prises determining a scaling factor for each sig-
nal set; and
the scaling step comprises scaling the power
level of each signal set using the scaling factor
determined for that set. 55

FIG. 1
PRIOR ART




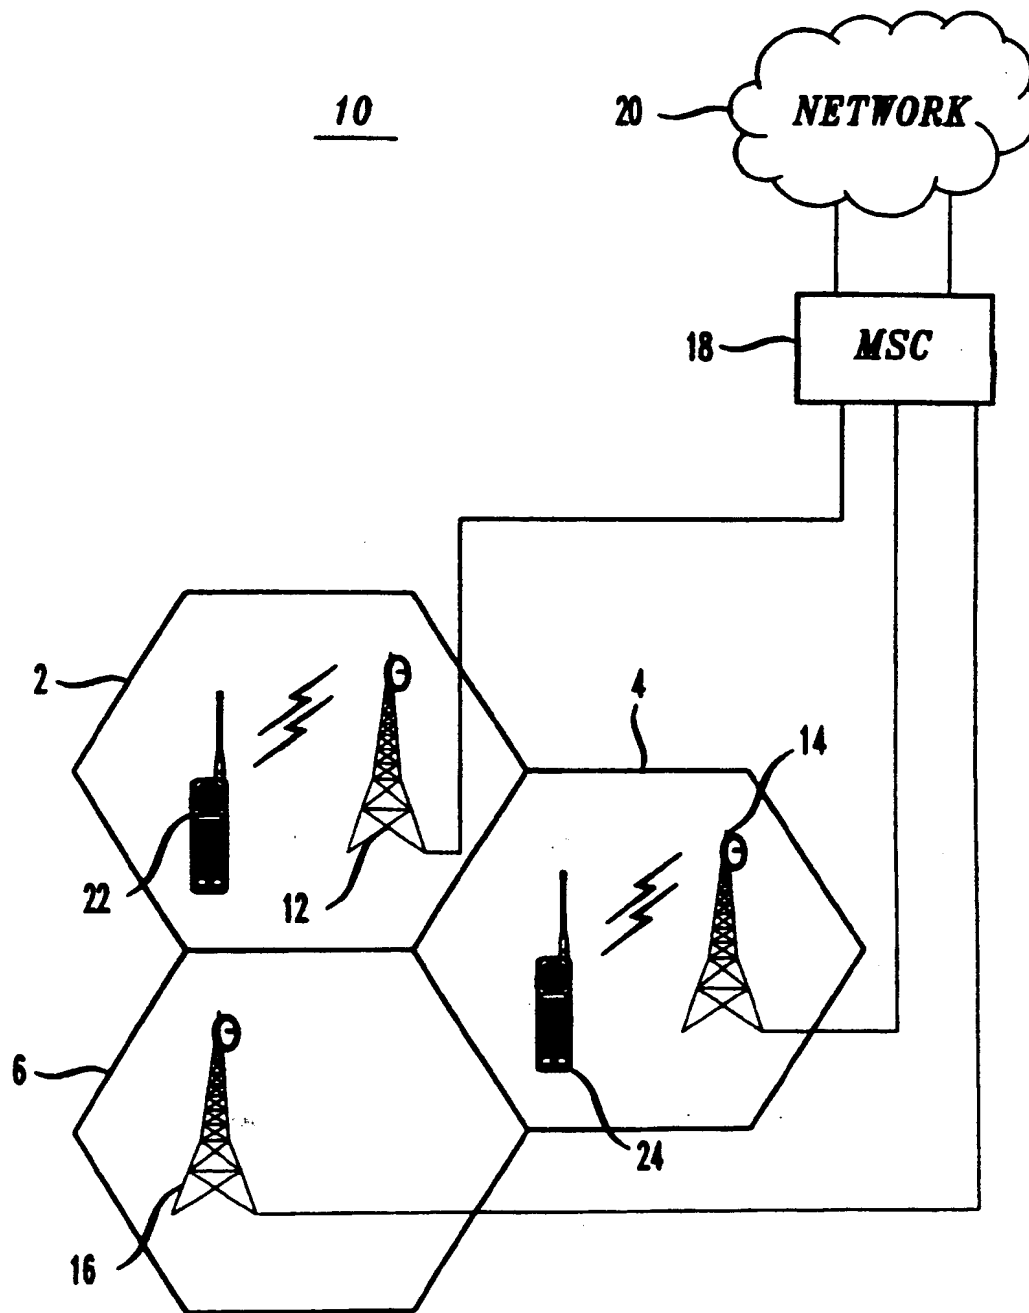


FIG. 2

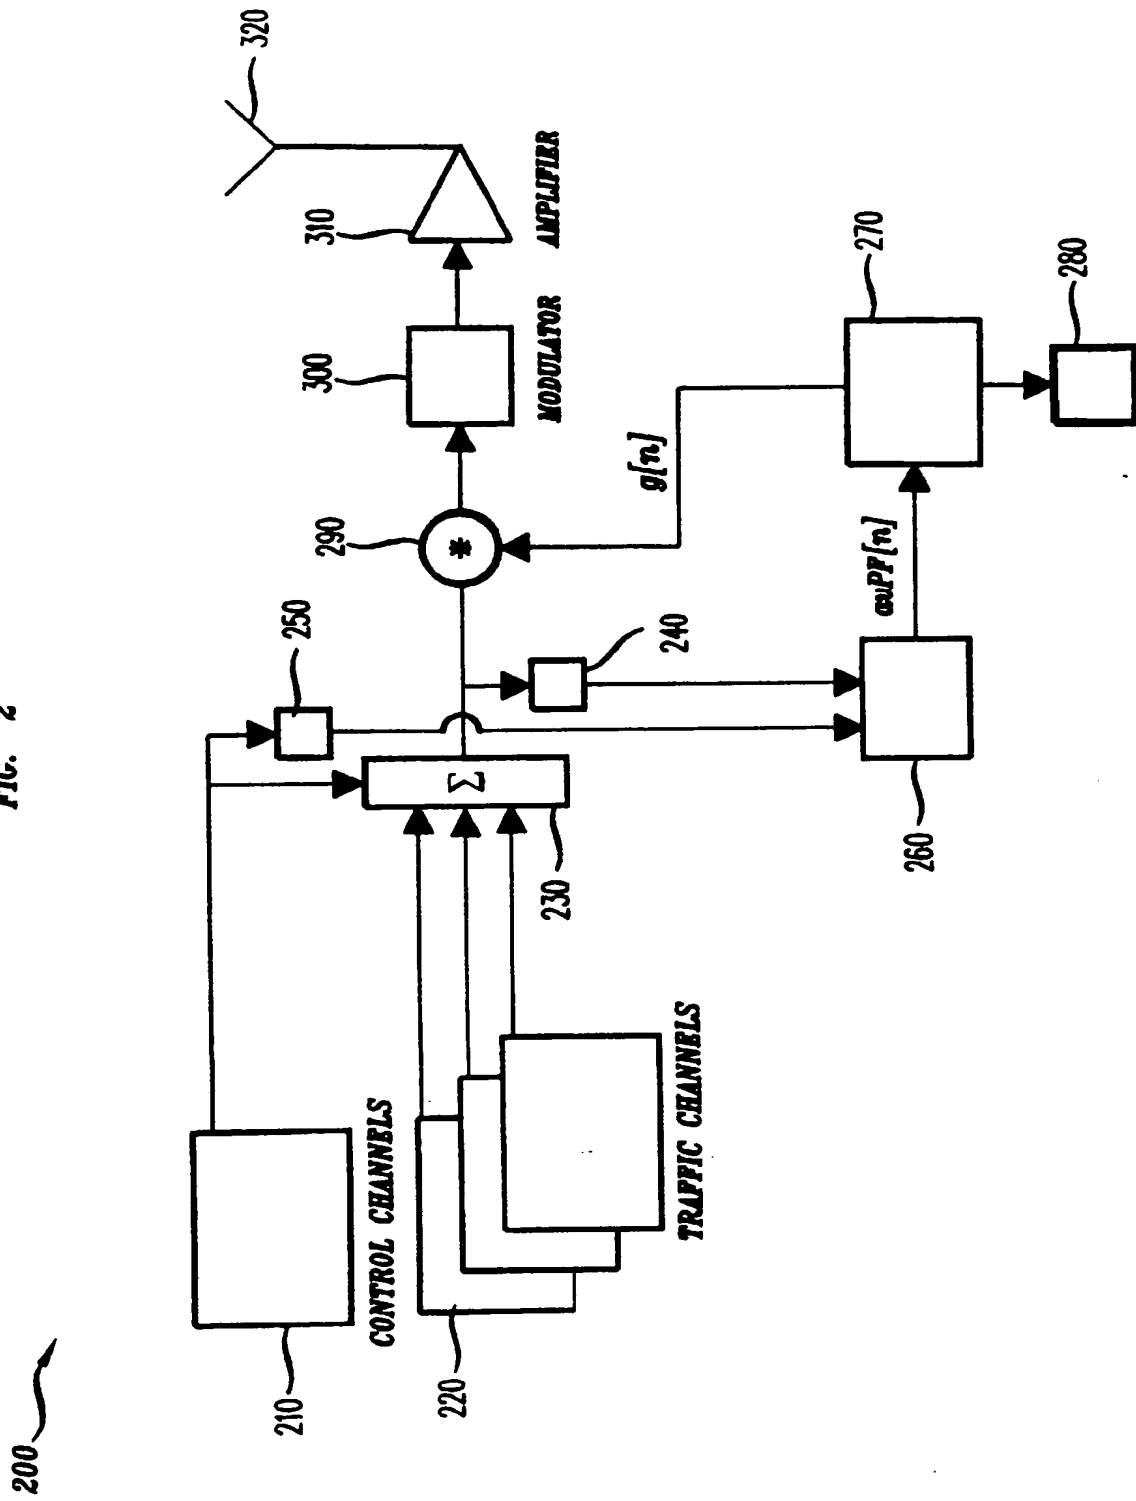

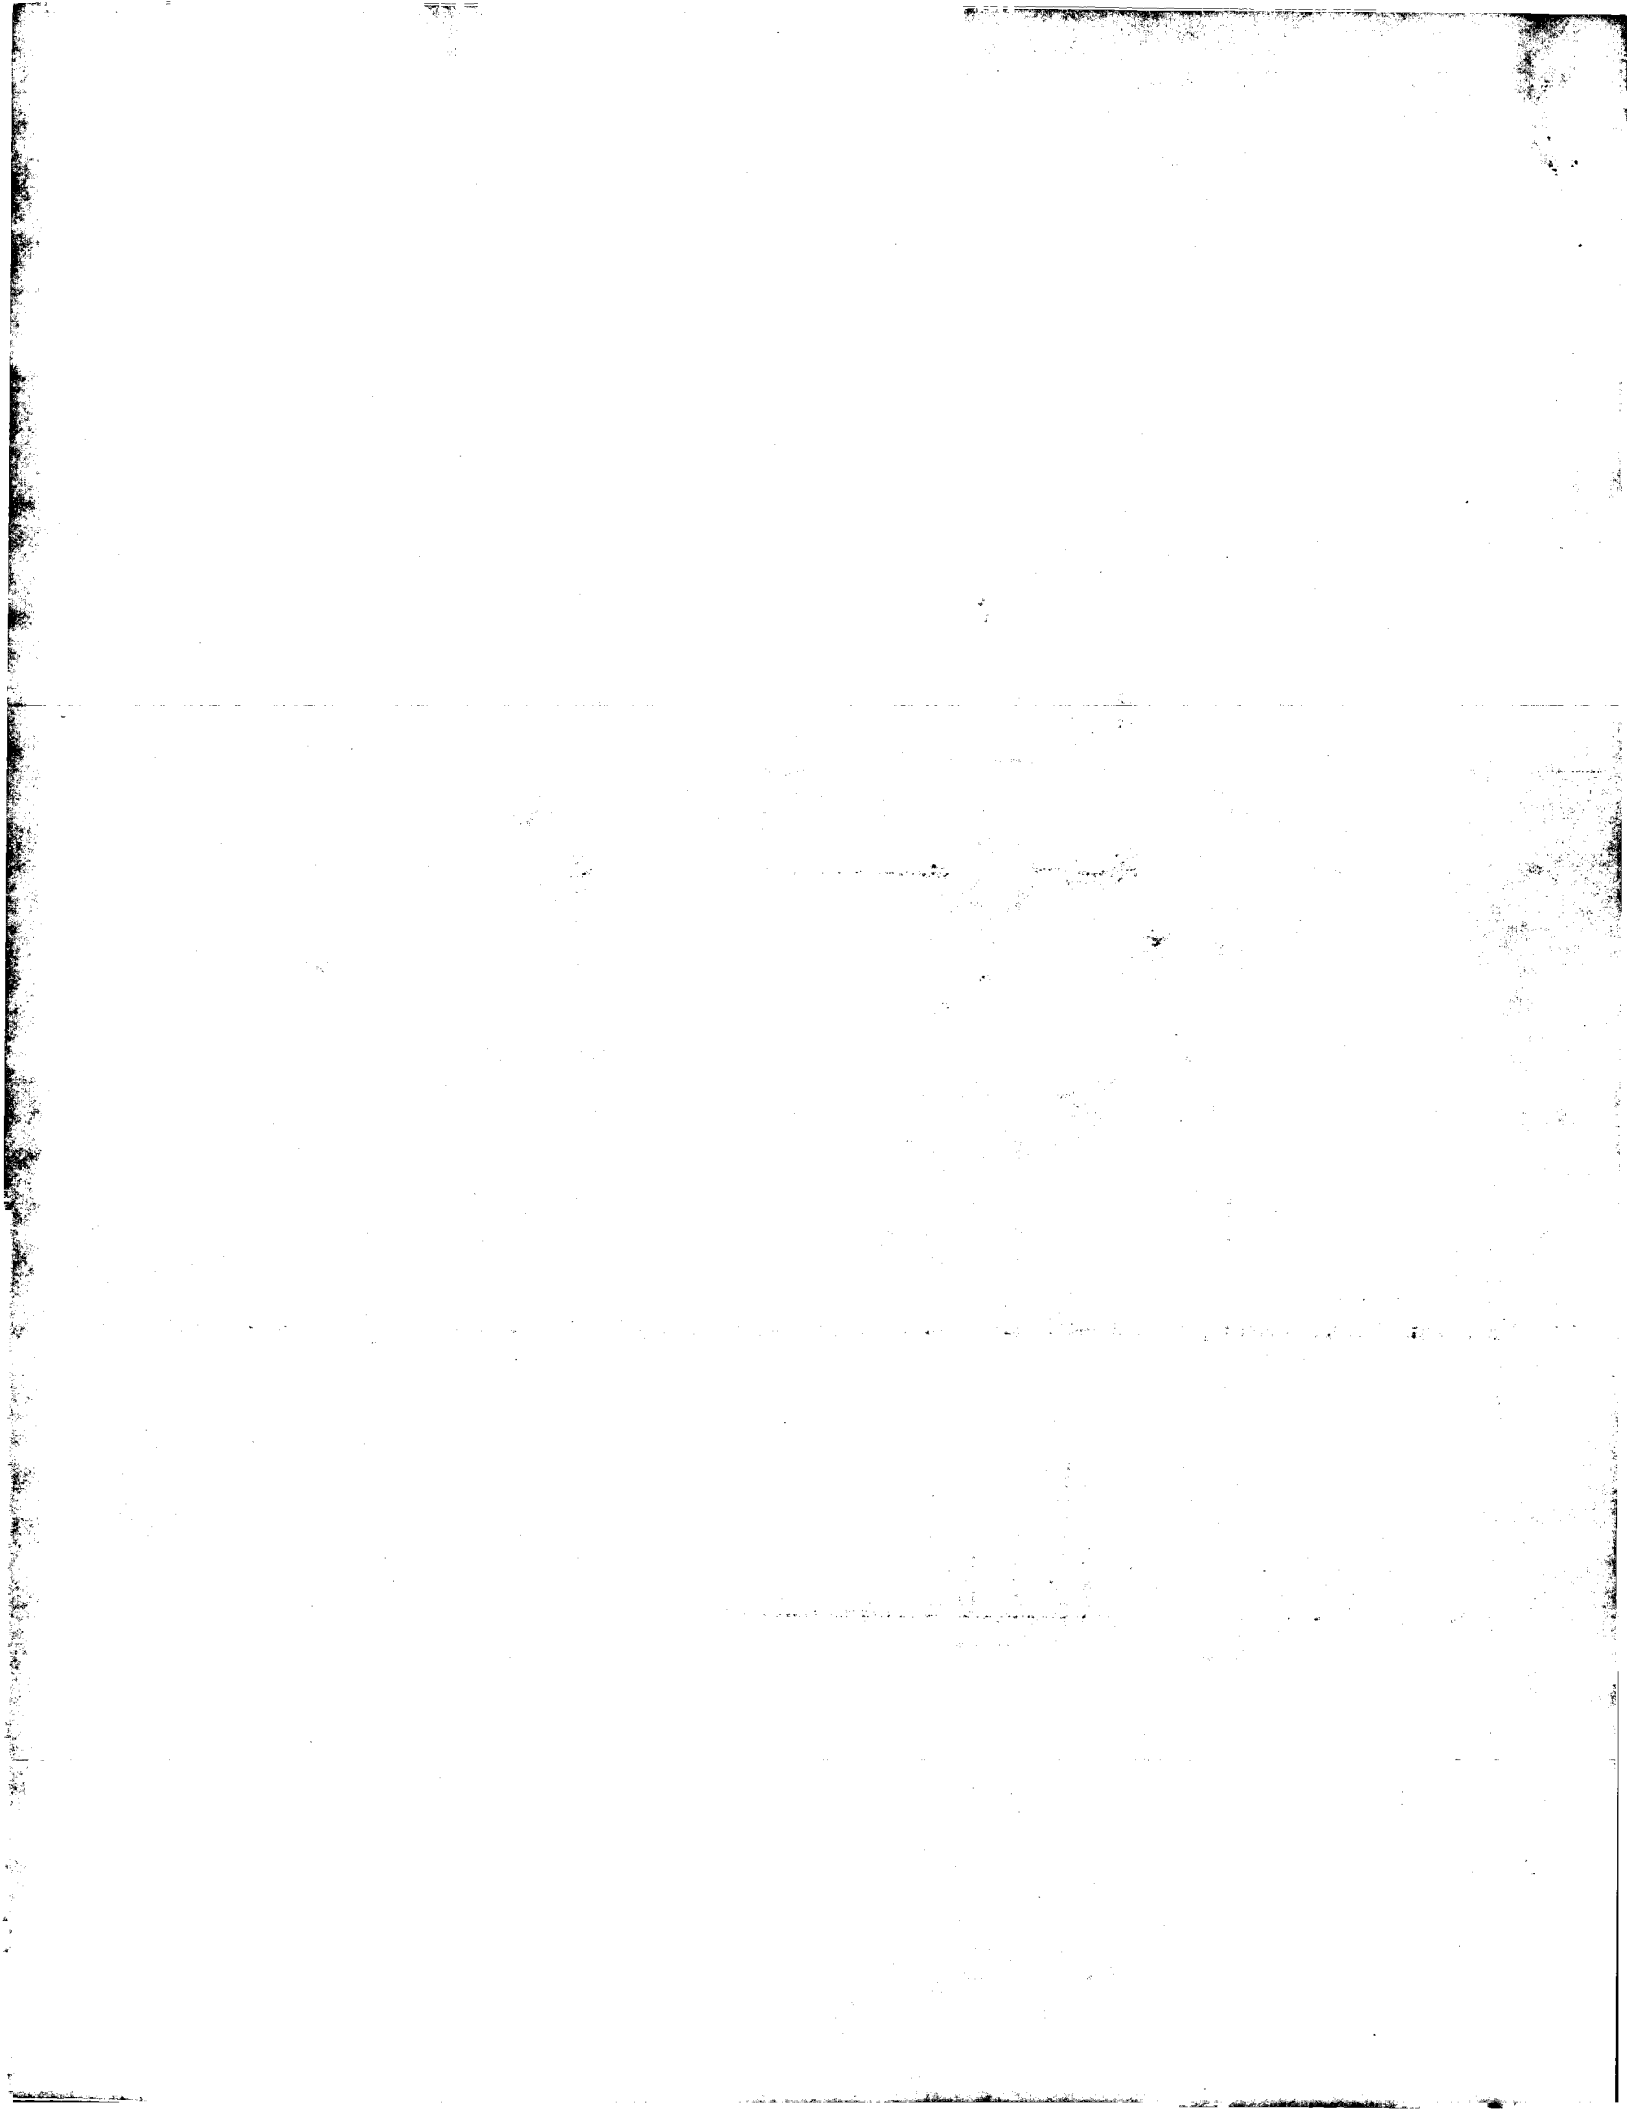



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) EP 1 087 541 A3

(12) EUROPEAN PATENT APPLICATION

(88) Date of publication A3:
29.01.2003 Bulletin 2003/05

(51) Int Cl.7: H04B 7/005

(43) Date of publication A2:
28.03.2001 Bulletin 2001/13

(21) Application number: 00307609.8

(22) Date of filing: 04.09.2000

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE
Designated Extension States:
AL LT LV MK RO SI

(30) Priority: 14.09.1999 US 395494

(71) Applicant: LUCENT TECHNOLOGIES INC.
Murray Hill, New Jersey 07974-0636 (US)


(72) Inventors:
• Eibling, Edward Ellis
Convent Station, New Jersey 07961 (US)

- Kamel, Raafat Edward
Westfield, New Jersey 07090 (US)
- Kuo, Wen-Yi
Morganville, New Jersey 07751 (US)
- Thomas, Mathew
Scotch Plains, New Jersey 07076 (US)
- Weaver, Carl Francis
Morris Plains, New Jersey 07950 (US)

(74) Representative:
Watts, Christopher Malcolm Kelway, Dr. et al
Lucent Technologies (UK) Ltd,
5 Mornington Road
Woodford Green Essex, IG8 0TU (GB)

(54) Apparatus and method for controlling the transmission power of the forward link of a wireless communication system

(57) A method that adjusts the power level of a set of forward-link signals of a base station responsive to the loading of the forward link as determined by a power level measurement of the signal set. One power level measurement is a pilot fraction of the forward link. Other power level measurements, such as the signal set's power level, can be used, alone or in combination, instead of or in addition to the pilot fraction of the forward link to adjust the power level of the signal set. The power level of the signal set can be changed in any manner, including by scaling it by a scaling factor, or by increasing the power level by a fixed or a variable amount. The power level measurement of the signal set is obtained during a current time period. The scaling factor that will be used in the subsequent time period is determined using the power level measurement. In one embodiment of the invention, the scaling factor can be obtained from a look-up table that is based on the power level measurement. If the cell containing the base station includes several sectors, the power level of the signal set in a sector is adjusted when the power level measurement in that sector indicates that the power level should be adjusted.

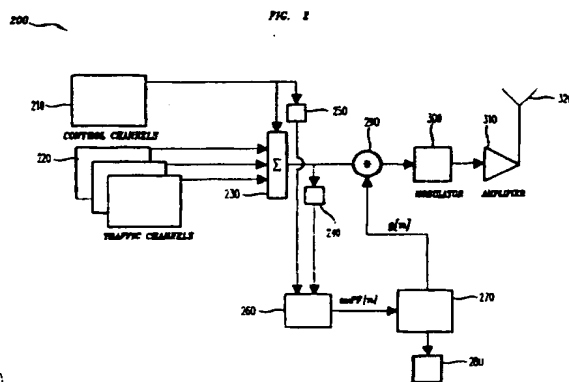



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 00 30 7609

| DOCUMENTS CONSIDERED TO BE RELEVANT | | | |
|---|---|--|---|
| Category | Citation of document with indication, where appropriate, of relevant passages | Relevant to claim | CLASSIFICATION OF THE APPLICATION (Int.Cl.7) |
| X | US 5 715 526 A (WEAVER JR LINDSAY A ET AL) 3 February 1998 (1998-02-03) * abstract * * column 5, line 56 - column 6, line 26 * * column 6, line 66 - column 7, line 17 * * column 7, line 35 - column 8, line 3 * * column 17, line 34 - column 19, line 23 * * figures 2,3 * | 1,3,4 | H04B7/005 |
| X | EP 0 887 947 A (NIPPON ELECTRIC CO) 30 December 1998 (1998-12-30) * abstract * * page 3, line 28 - line 58 * * page 5, line 27 - page 6, line 3 * * page 7, line 17 - line 32 * * figures 1,3,4 * | 1,3,4 | |
| X | KIM D ET AL: "FORWARD LINK POWER CONTROL FOR CDMA CELLULAR SYSTEMS" IEICE TRANSACTIONS ON COMMUNICATIONS, INSTITUTE OF ELECTRONICS INFORMATION AND COMM. ENG. TOKYO, JP, vol. E81-B, no. 6, 1 June 1998 (1998-06-01), pages 1224-1230, XP000788970 ISSN: 0916-8516 * abstract * * page 1224, left-hand column, paragraph 3 - right-hand column, paragraph 1 * * page 1225, right-hand column, paragraph 1 - page 1226, right-hand column, paragraph 2 * * page 1227, right-hand column, paragraph 3 - page 1228, left-hand column, paragraph 3 * -/- | 1,2 | <div>TECHNICAL FIELDS SEARCHED (Int.Cl.7)</div> <div>H04B</div> |
| The present search report has been drawn up for all claims | | | |
| Place of search THE HAGUE | | Date of completion of the search 5 December 2002 | Examiner López Márquez, T |
| <div>CATEGORY OF CITED DOCUMENTS</div> <div> X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document </div> | | | |

EPO FORM 1503 (3.82) (PUBCOI)



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 00 30 7609

| DOCUMENTS CONSIDERED TO BE RELEVANT | | | |
|---|---|---|--|
| Category | Citation of document with indication, where appropriate, of relevant passages | Relevant to claim | CLASSIFICATION OF THE APPLICATION (Int.Cl.7) |
| X | KIM D: "FORWARD LINK POWER ALLOCATION FOR IS-95 BASED CDMA MOBILE SYSTEMS" ICC '99. 1999 IEEE INTERNATIONAL CONFERENCE ON COMMUNICATIONS. CONFERENCE RECORD. VANCOUVER, CA, JUNE 6 - 10, 1999, IEEE INTERNATIONAL CONFERENCE ON COMMUNICATIONS, NEW YORK, NY: IEEE, US, vol. 2, 6 June 1999 (1999-06-06), pages 1126-1130, XP000898032 ISBN: 0-7803-5285-8 * abstract * * page 1126, left-hand column, paragraph 3 - right-hand column, paragraph 1 * * page 1228, right-hand column, paragraph 4 - page 1229, left-hand column, paragraph 1 * | 1,2 | TECHNICAL FIELDS SEARCHED (Int.Cl.7) |
| A | EP 0 817 400 A (NIPPON ELECTRIC CO) 7 January 1998 (1998-01-07) * abstract * * column 4, line 14 - column 5, line 17 * * figures 3,4 * | 1 | |
| A | US 5 930 242 A (MIMURA YUKIE) 27 July 1999 (1999-07-27) * abstract * * column 2, line 64 - column 3, line 18 * | 1 | |
| The present search report has been drawn up for all claims | | | |
| Place of search THE HAGUE | | Date of completion of the search 5 December 2002 | Examiner López Márquez, T |
| <p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> | | <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p> | |

EPC FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 00 30 7609

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

05-12-2002

| Patent document cited in search report | | Publication date | Patent family member(s) | Publication date |
|---|---|---------------------|----------------------------|---------------------|
| US 5715526 | A | 03-02-1998 | AU 704781 B2 | 06-05-1999 |
| | | | AU 7155996 A | 27-03-1997 |
| | | | CA 2237903 A1 | 13-03-1997 |
| | | | CN 1208519 A | 17-02-1999 |
| | | | EP 0855111 A1 | 29-07-1998 |
| | | | RU 2156545 C2 | 20-09-2000 |
| | | | WO 9709794 A1 | 13-03-1997 |
| EP 0887947 | A | 30-12-1998 | BR 9802565 A | 03-11-1999 |
| | | | CN 1344076 A | 10-04-2002 |
| | | | CN 1206263 A ,B | 27-01-1999 |
| | | | EP 0887947 A2 | 30-12-1998 |
| | | | JP 3129285 B2 | 29-01-2001 |
| | | | JP 11074834 A | 16-03-1999 |
| | | | KR 268145 B1 | 16-10-2000 |
| | | | US 6393005 B1 | 21-05-2002 |
| EP 0817400 | A | 07-01-1998 | JP 2839014 B2 | 16-12-1998 |
| | | | JP 10022975 A | 23-01-1998 |
| | | | AU 716425 B2 | 24-02-2000 |
| | | | AU 2849697 A | 15-01-1998 |
| | | | CA 2209729 A1 | 05-01-1998 |
| | | | EP 0817400 A2 | 07-01-1998 |
| | | | US 6026081 A | 15-02-2000 |
| US 5930242 | A | 27-07-1999 | JP 2959458 B2 | 06-10-1999 |
| | | | JP 9200837 A | 31-07-1997 |
| | | | KR 274711 B1 | 15-12-2000 |

DOCKET NO: 686-I0259SERIAL NO: 10/715,070APPLICANT: Wenzel et al.

LERNER AND GREENBERG P.A.

P.O. BOX 2480

HOLLYWOOD, FLORIDA 33022

TEL. (954) 925-1100